

VIOLET DRILLS

HSS

VSD
Straight shank



DC<0.7


DC≥0.7

DC<2

DC≥2

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron			

0.5≤DC<1	1≤DC≤3	3<DC≤6	6<DC≤10	10<DC≤13
⁰ -0.010	⁰ -0.014	⁰ -0.018	⁰ -0.022	⁰ -0.027

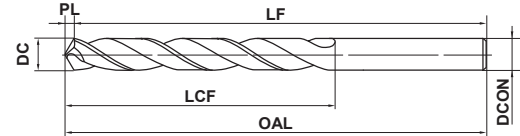

Unit : mm

Order Number	DC	LCF	OAL	LF	PL	DCON	Stock
VSDD0050	0.5	6.18	27.18	27	0.18	0.5	●
VSDD0060	0.6	7.21	30.21	30	0.21	0.6	●
VSDD0070	0.7	9.21	32.21	32	0.21	0.7	●
VSDD0080	0.8	10.24	34.24	34	0.24	0.8	●
VSDD0090	0.9	11.27	36.27	36	0.27	0.9	●
VSDD0100	1.0	12.3	40.3	40	0.3	1.0	●
VSDD0110	1.1	14.3	42.3	42	0.3	1.1	●
VSDD0120	1.2	16.4	42.4	42	0.4	1.2	●
VSDD0130	1.3	16.4	45.4	45	0.4	1.3	●
VSDD0140	1.4	18.4	48.4	48	0.4	1.4	●
VSDD0150	1.5	18.5	48.5	48	0.5	1.5	●
VSDD0160	1.6	20.5	50.5	50	0.5	1.6	●
VSDD0170	1.7	20.5	50.5	50	0.5	1.7	●
VSDD0180	1.8	22.5	52.5	52	0.5	1.8	●
VSDD0190	1.9	22.6	52.6	52	0.6	1.9	●
VSDD0200	2.0	23.6	55.6	55	0.6	2.0	●
VSDD0210	2.1	23.6	55.6	55	0.6	2.1	●
VSDD0220	2.2	26.7	58.7	58	0.7	2.2	●
VSDD0230	2.3	26.7	58.7	58	0.7	2.3	●
VSDD0240	2.4	29.7	61.7	61	0.7	2.4	●
VSDD0250	2.5	29.8	61.8	61	0.8	2.5	●
VSDD0260	2.6	29.8	64.8	64	0.8	2.6	●
VSDD0270	2.7	32.8	64.8	64	0.8	2.7	●
VSDD0280	2.8	32.8	67.8	67	0.8	2.8	●
VSDD0290	2.9	32.9	71.9	71	0.9	2.9	●
VSDD0300	3.0	32.9	71.9	71	0.9	3.0	●
VSDD0310	3.1	35.9	71.9	71	0.9	3.1	●
VSDD0320	3.2	36.0	72.0	71	1.0	3.2	●
VSDD0330	3.3	36.0	74.0	73	1.0	3.3	●
VSDD0340	3.4	39.0	74.0	73	1.0	3.4	●
VSDD0350	3.5	39.1	74.1	73	1.1	3.5	●
VSDD0360	3.6	39.1	77.1	76	1.1	3.6	●
VSDD0370	3.7	39.1	77.1	76	1.1	3.7	●
VSDD0380	3.8	43.1	77.1	76	1.1	3.8	●
VSDD0390	3.9	43.2	80.2	79	1.2	3.9	●
VSDD0400	4.0	43.2	84.2	83	1.2	4.0	●
VSDD0410	4.1	43.2	84.2	83	1.2	4.1	●
VSDD0420	4.2	43.3	84.3	83	1.3	4.2	●
VSDD0430	4.3	47.3	84.3	83	1.3	4.3	●
VSDD0440	4.4	47.3	87.3	86	1.3	4.4	●

Order Number	DC	LCF	OAL	LF	PL	DCON	Stock
VSDD0450	4.5	47.4	87.4	86	1.4	4.5	●
VSDD0460	4.6	47.4	87.4	86	1.4	4.6	●
VSDD0470	4.7	47.4	90.4	89	1.4	4.7	●
VSDD0480	4.8	52.4	90.4	89	1.4	4.8	●
VSDD0490	4.9	52.5	93.5	92	1.5	4.9	●
VSDD0500	5.0	52.5	93.5	92	1.5	5.0	●
VSDD0510	5.1	52.5	93.5	92	1.5	5.1	●
VSDD0520	5.2	52.6	96.6	95	1.6	5.2	●
VSDD0530	5.3	52.6	96.6	95	1.6	5.3	●
VSDD0540	5.4	57.6	96.6	95	1.6	5.4	●
VSDD0550	5.5	57.7	96.7	95	1.7	5.5	●
VSDD0560	5.6	57.7	99.7	98	1.7	5.6	●
VSDD0570	5.7	57.7	99.7	98	1.7	5.7	●
VSDD0580	5.8	57.7	99.7	98	1.7	5.8	●
VSDD0590	5.9	57.8	99.8	98	1.8	5.9	●
VSDD0600	6.0	57.8	103.8	102	1.8	6.0	●
VSDD0610	6.1	63.8	103.8	102	1.8	6.1	●
VSDD0620	6.2	63.9	103.9	102	1.9	6.2	●
VSDD0630	6.3	63.9	103.9	102	1.9	6.3	●
VSDD0640	6.4	63.9	106.9	105	1.9	6.4	●
VSDD0650	6.5	64.0	107.0	105	2.0	6.5	●
VSDD0660	6.6	64.0	107.0	105	2.0	6.6	●
VSDD0670	6.7	64.0	107.0	105	2.0	6.7	●
VSDD0680	6.8	69.0	107.0	105	2.0	6.8	●
VSDD0690	6.9	69.1	107.1	105	2.1	6.9	●
VSDD0700	7.0	69.1	107.1	105	2.1	7.0	●
VSDD0710	7.1	69.1	110.1	108	2.1	7.1	●
VSDD0720	7.2	69.2	110.2	108	2.2	7.2	●
VSDD0730	7.3	69.2	110.2	108	2.2	7.3	●
VSDD0740	7.4	69.2	113.2	111	2.2	7.4	●
VSDD0750	7.5	69.3	113.3	111	2.3	7.5	●
VSDD0760	7.6	75.3	113.3	111	2.3	7.6	●
VSDD0770	7.7	75.3	116.3	114	2.3	7.7	●
VSDD0780	7.8	75.3	116.3	114	2.3	7.8	●
VSDD0790	7.9	75.4	116.4	114	2.4	7.9	●
VSDD0800	8.0	75.4	116.4	114	2.4	8.0	●
VSDD0810	8.1	75.4	119.4	117	2.4	8.1	●
VSDD0820	8.2	75.5	119.5	117	2.5	8.2	●
VSDD0830	8.3	75.5	119.5	117	2.5	8.3	●
VSDD0840	8.4	75.5	123.5	121	2.5	8.4	●

DRILLING

● : Inventory maintained in Japan.

Unit : mm

Order Number	DC	LCF	OAL	LF	PL	DCON	Stock
VSDD0850	8.5	75.6	123.6	121	2.6	8.5	●
VSD0860	8.6	81.6	123.6	121	2.6	8.6	●
VSD0870	8.7	81.6	123.6	121	2.6	8.7	●
VSD0880	8.8	81.6	126.6	124	2.6	8.8	●
VSD0890	8.9	81.7	126.7	124	2.7	8.9	●
VSD0900	9.0	81.7	126.7	124	2.7	9.0	●
VSD0910	9.1	81.7	126.7	124	2.7	9.1	●
VSD0920	9.2	81.8	129.8	127	2.8	9.2	●
VSD0930	9.3	81.8	129.8	127	2.8	9.3	●
VSD0940	9.4	81.8	129.8	127	2.8	9.4	●
VSD0950	9.5	81.9	129.9	127	2.9	9.5	●
VSD0960	9.6	87.9	132.9	130	2.9	9.6	●
VSD0970	9.7	87.9	132.9	130	2.9	9.7	●
VSD0980	9.8	87.9	132.9	130	2.9	9.8	●
VSD0990	9.9	88.0	133.0	130	3.0	9.9	●
VSD1000	10.0	88.0	133.0	130	3.0	10.0	●
VSD1010	10.1	88.0	136.0	133	3.0	10.1	●
VSD1020	10.2	88.1	136.1	133	3.1	10.2	●
VSD1030	10.3	88.1	136.1	133	3.1	10.3	●
VSD1040	10.4	88.1	136.1	133	3.1	10.4	●
VSD1050	10.5	88.2	140.2	137	3.2	10.5	●
VSD1060	10.6	88.2	140.2	137	3.2	10.6	●
VSD1070	10.7	95.2	140.2	137	3.2	10.7	●

Order Number	DC	LCF	OAL	LF	PL	DCON	Stock
VSDD1080	10.8	95.2	143.2	140	3.2	10.8	●
VSDD1090	10.9	95.3	143.3	140	3.3	10.9	●
VSDD1100	11.0	95.3	143.3	140	3.3	11.0	●
VSDD1110	11.1	95.3	143.3	140	3.3	11.1	●
VSDD1120	11.2	95.4	146.4	143	3.4	11.2	●
VSDD1130	11.3	95.4	146.4	143	3.4	11.3	●
VSDD1140	11.4	95.4	146.4	143	3.4	11.4	●
VSDD1150	11.5	95.5	146.5	143	3.5	11.5	●
VSDD1160	11.6	95.5	149.5	146	3.5	11.6	●
VSDD1170	11.7	95.5	149.5	146	3.5	11.7	●
VSDD1180	11.8	95.5	149.5	146	3.5	11.8	●
VSDD1190	11.9	102.6	149.6	146	3.6	11.9	●
VSDD1200	12.0	102.6	152.6	149	3.6	12.0	●
VSDD1210	12.1	102.6	152.6	149	3.6	12.1	●
VSDD1220	12.2	102.7	152.7	149	3.7	12.2	●
VSDD1230	12.3	102.7	152.7	149	3.7	12.3	●
VSDD1240	12.4	102.7	155.7	152	3.7	12.4	●
VSDD1250	12.5	102.8	155.8	152	3.8	12.5	●
VSDD1260	12.6	102.8	155.8	152	3.8	12.6	●
VSDD1270	12.7	102.8	155.8	152	3.8	12.7	●
VSDD1280	12.8	102.8	155.8	152	3.8	12.8	●
VSDD1290	12.9	102.9	155.9	152	3.9	12.9	●
VSDD1300	13.0	102.9	155.9	152	3.9	13.0	●

RECOMMENDED CUTTING CONDITIONS

Work Material	Structural steel		Carbon steel AISI 1049		Stainless steel AISI 420		Stainless steel AISI 304 Tool steel AISI D2 (Low-hardness materials) Heat-treated steel AISI H13 (-40HRC)	
	40m/min		30m/min		20m/min		10-14m/min	
Cutting speed	40m/min		30m/min		20m/min		10-14m/min	
Drill Dia. DC (mm)	Revolution (min ⁻¹)	Feed rate (mm/rev)	Revolution (min ⁻¹)	Feed rate (mm/rev)	Revolution (min ⁻¹)	Feed rate (mm/rev)	Revolution (min ⁻¹)	Feed rate (mm/rev)
0.5	15000	0.01	11250	0.01	7500	0.01	5620	0.01
1.0	10000	0.02	7500	0.02	5000	0.02	3750	0.02
1.5	8200	0.03	6150	0.03	4100	0.03	2800	0.03
2.0	6370	0.05	4780	0.05	3180	0.05	2200	0.04
3.0	4250	0.10	3180	0.10	2120	0.07	1400	0.06
4.0	3180	0.13	2390	0.13	1590	0.09	1100	0.08
5.0	2550	0.15	1910	0.15	1270	0.11	860	0.10
6.0	2120	0.18	1590	0.18	1060	0.13	720	0.11
7.0	1820	0.20	1360	0.20	910	0.14	610	0.12
8.0	1590	0.22	1190	0.21	800	0.15	540	0.13
9.0	1420	0.24	1060	0.22	710	0.17	480	0.14
10.0	1270	0.26	960	0.23	640	0.18	430	0.15
11.0	1160	0.28	870	0.24	580	0.19	390	0.16
12.0	1060	0.30	800	0.25	530	0.20	360	0.17
13.0	980	0.30	730	0.26	490	0.20	330	0.17

- 1) Please reduce the revolution depending on drilling situation when the application lacks rigidity.
- 2) Please use step drilling and reduce the cutting conditions in the case when the drilling depth exceeds 3DC (DC: drill diameter).
- 3) The above-mentioned cutting condition is standard when using water-soluble cutting fluid.
Please reduce the revolution when using non-water-soluble cutting fluid.