


## Micro 3-Flute

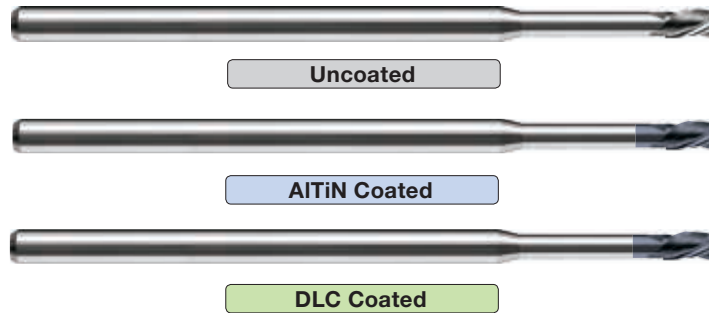

### 3-Flute, Corner Radius, Long Reach, Stub Flute, 30° Helix (.0938-.2500)

Cutter ø	Flute Length	XD LOC	OAL	Reach Length	XD Reach	Radius	Shank ø	Uncoated Part #	AITiN Coated Part #	DLC Coated Part #
.0938	.139	1.5	2-1/2	.750	8	.005	1/8	<a href="#">RET7917</a>	<a href="#">RET7918</a>	<a href="#">RET7919</a>
.0938	.139	1.5	2-1/2	.750	8	.010	1/8	<a href="#">RET7920</a>	<a href="#">RET7921</a>	<a href="#">RET7922</a>
.0938	.139	1.5	2-1/2	.750	8	.015	1/8	<a href="#">RET7923</a>	<a href="#">RET7924</a>	<a href="#">RET7925</a>
.0938	.139	1.5	2-1/2	1.125	12	.005	1/8	<a href="#">RET7926</a>	<a href="#">RET7927</a>	<a href="#">RET7928</a>
.0938	.139	1.5	2-1/2	1.125	12	.010	1/8	<a href="#">RET7929</a>	<a href="#">RET7930</a>	<a href="#">RET7931</a>
.0938	.139	1.5	2-1/2	1.125	12	.015	1/8	<a href="#">RET7932</a>	<a href="#">RET7933</a>	<a href="#">RET7934</a>
.1250	.187	1.5	2-1/2	.625	5	.010	1/8	<a href="#">RET7935</a>	<a href="#">RET7936</a>	<a href="#">RET7937</a>
.1250	.187	1.5	2-1/2	.625	5	.015	1/8	<a href="#">RET7938</a>	<a href="#">RET7939</a>	<a href="#">RET7940</a>
.1250	.187	1.5	2-1/2	.625	5	.030	1/8	<a href="#">RET7941</a>	<a href="#">RET7942</a>	<a href="#">RET7943</a>
.1250	.187	1.5	2-1/2	1.000	8	.010	1/8	<a href="#">RET7944</a>	<a href="#">RET7945</a>	<a href="#">RET7946</a>
.1250	.187	1.5	2-1/2	1.000	8	.015	1/8	<a href="#">RET7947</a>	<a href="#">RET7948</a>	<a href="#">RET7949</a>
.1250	.187	1.5	2-1/2	1.000	8	.030	1/8	<a href="#">RET7950</a>	<a href="#">RET7951</a>	<a href="#">RET7952</a>
.1250	.187	1.5	3	1.500	12	.010	1/8	<a href="#">RET7953</a>	<a href="#">RET7954</a>	<a href="#">RET7955</a>
.1250	.187	1.5	3	1.500	12	.015	1/8	<a href="#">RET7956</a>	<a href="#">RET7957</a>	<a href="#">RET7958</a>
.1250	.187	1.5	3	1.500	12	.030	1/8	<a href="#">RET7959</a>	<a href="#">RET7960</a>	<a href="#">RET7961</a>
.1562	.234	1.5	3	.750	5	.010	3/16	<a href="#">RET7962</a>	<a href="#">RET7963</a>	<a href="#">RET7964</a>
.1562	.234	1.5	3	.750	5	.015	3/16	<a href="#">RET7965</a>	<a href="#">RET7966</a>	<a href="#">RET7967</a>
.1562	.234	1.5	3	1.250	8	.010	3/16	<a href="#">RET7968</a>	<a href="#">RET7969</a>	<a href="#">RET7970</a>
.1562	.234	1.5	3	1.250	8	.015	3/16	<a href="#">RET7971</a>	<a href="#">RET7972</a>	<a href="#">RET7973</a>
.1875	.281	1.5	3	1.000	5	.015	3/16	<a href="#">RET7974</a>	<a href="#">RET7975</a>	<a href="#">RET7976</a>
.1875	.281	1.5	3	1.000	5	.030	3/16	<a href="#">RET7977</a>	<a href="#">RET7978</a>	<a href="#">RET7979</a>
.1875	.281	1.5	3	1.500	8	.015	3/16	<a href="#">RET7980</a>	<a href="#">RET7981</a>	<a href="#">RET7982</a>
.1875	.281	1.5	3	1.500	8	.030	3/16	<a href="#">RET7983</a>	<a href="#">RET7984</a>	<a href="#">RET7985</a>
.1875	.281	1.5	4	2.250	12	.015	3/16	<a href="#">RET7986</a>	<a href="#">RET7987</a>	<a href="#">RET7988</a>
.1875	.281	1.5	4	2.250	12	.030	3/16	<a href="#">RET7989</a>	<a href="#">RET7990</a>	<a href="#">RET7991</a>
.2500	.375	1.5	4	1.250	5	.015	1/4	<a href="#">RET7992</a>	<a href="#">RET7993</a>	<a href="#">RET7994</a>
.2500	.375	1.5	4	1.250	5	.030	1/4	<a href="#">RET7995</a>	<a href="#">RET7996</a>	<a href="#">RET7997</a>
.2500	.375	1.5	4	2.000	8	.015	1/4	<a href="#">RET7998</a>	<a href="#">RET7999</a>	<a href="#">RET8000</a>
.2500	.375	1.5	4	2.000	8	.030	1/4	<a href="#">RET8001</a>	<a href="#">RET8002</a>	<a href="#">RET8003</a>
.2500	.375	1.5	6	3.000	12	.015	1/4	<a href="#">RET8004</a>	<a href="#">RET8005</a>	<a href="#">RET8006</a>
.2500	.375	1.5	6	3.000	12	.030	1/4	<a href="#">RET8007</a>	<a href="#">RET8008</a>	<a href="#">RET8009</a>

Carbide Endmills



Speeds & Feeds page 217.

Tolerances	Diameter	Shank	Radius
All Sizes	+0.0005, -0.0005	+0.000, -0.0003	+0.001, -0.001