




AlTiN Coated

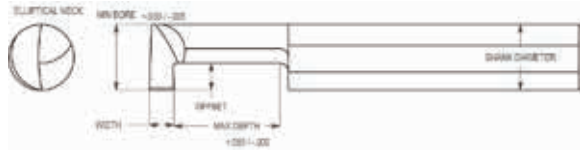

Carbide Extreme Grooving Bars

Minimum Hole	Groove Width	Offset	Max. Depth	OAL	Shank ø	AlTiN Coated Part #
.2500	.017/.018	.050	.250	2-1/2	1/4	RGB221100
	.017/.018	.050	.375	2-1/2	1/4	RGB221105
	.017/.018	.050	.500	2-1/2	1/4	RGB221110
	.017/.018	.050	.625	2-1/2	1/4	RGB221115
	.025/.026	.050	.250	2-1/2	1/4	RGB221120
	.025/.026	.050	.375	2-1/2	1/4	RGB221125
	.025/.026	.050	.500	2-1/2	1/4	RGB221130
	.025/.026	.050	.625	2-1/2	1/4	RGB221135
	.030/.031	.050	.250	2-1/2	1/4	RGB221140
	.030/.031	.050	.375	2-1/2	1/4	RGB221145
	.030/.031	.050	.500	2-1/2	1/4	RGB221150
	.030/.031	.050	.625	2-1/2	1/4	RGB221155
	.062/.064	.050	.250	2-1/2	1/4	RGB221160
	.062/.064	.050	.375	2-1/2	1/4	RGB221165
	.062/.064	.050	.500	2-1/2	1/4	RGB221170
	.062/.064	.050	.625	2-1/2	1/4	RGB221175
	.093/.095	.050	.250	2-1/2	1/4	RGB221180
	.093/.095	.050	.375	2-1/2	1/4	RGB221185
	.093/.095	.050	.500	2-1/2	1/4	RGB221190
	.093/.095	.050	.625	2-1/2	1/4	RGB221195
.125/.127	.050	.250	2-1/2	1/4	RGB221200	
.125/.127	.050	.375	2-1/2	1/4	RGB221205	
.125/.127	.050	.500	2-1/2	1/4	RGB221210	
.125/.127	.050	.625	2-1/2	1/4	RGB221215	
.3125	.033/.034	.100	.250	2-1/2	5/16	RGB221220
	.033/.034	.100	.375	2-1/2	5/16	RGB221225
	.033/.034	.100	.500	2-1/2	5/16	RGB221230
	.033/.034	.100	.625	2-1/2	5/16	RGB221235
	.038/.039	.100	.250	2-1/2	5/16	RGB221240
	.038/.039	.100	.375	2-1/2	5/16	RGB221245
	.038/.039	.100	.500	2-1/2	5/16	RGB221250
	.038/.039	.100	.625	2-1/2	5/16	RGB221255
	.062/.064	.100	.500	2-1/2	5/16	RGB221260
	.062/.064	.100	.750	2-1/2	5/16	RGB221265
	.062/.064	.100	1.000	2-1/2	5/16	RGB221270
	.093/.095	.100	.500	2-1/2	5/16	RGB221275
	.093/.095	.100	.750	2-1/2	5/16	RGB221280
	.093/.095	.100	1.000	2-1/2	5/16	RGB221285
	.125/.127	.100	.500	2-1/2	5/16	RGB221290
	.125/.127	.100	.750	2-1/2	5/16	RGB221295
.125/.127	.100	1.000	2-1/2	5/16	RGB221300	



Speeds, feeds and tech info pages 544-545.