




Uncoated

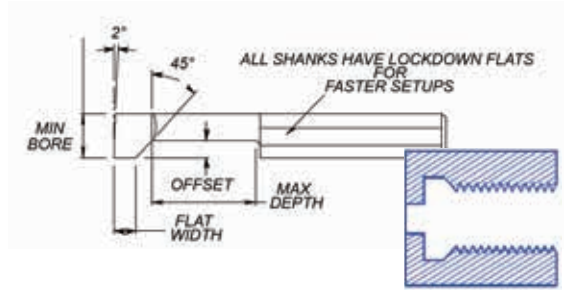

**Carbide Thread Relief Bars**

Minimum Bore	Flat Width	Offset	Max Depth	OAL	Shank $\phi$	Uncoated Part #
.125	.060	.045	.300	2	1/8	<a href="#">RTB461100</a>
	.060	.045	.400	2	1/8	<a href="#">RTB461105</a>
.187	.080	.050	.400	2-1/2	3/16	<a href="#">RTB461110</a>
	.080	.050	.800	2-1/2	3/16	<a href="#">RTB461115</a>
.250	.095	.060	.500	2-1/2	1/4	<a href="#">RTB461120</a>
	.095	.060	1.000	2-1/2	1/4	<a href="#">RTB461125</a>
.312	.095	.080	.750	2-1/2	5/16	<a href="#">RTB461130</a>
	.095	.080	1.250	2-1/2	5/16	<a href="#">RTB461135</a>
.375	.130	.120	.750	2-1/2	3/8	<a href="#">RTB461140</a>
	.130	.120	1.250	2-1/2	3/8	<a href="#">RTB461145</a>
.500	.160	.130	1.000	3	1/2	<a href="#">RTB461150</a>
	.160	.130	1.500	3	1/2	<a href="#">RTB461155</a>

Carbide Bars

