


NCTH-TYPE - Screw thread type *New*

- ※ Screw thread type, Appropriate model for NC lathes
- ※ Coolant-proof models
- ※ Triple bearing method
- ※ Appropriate RPM(below 3800)

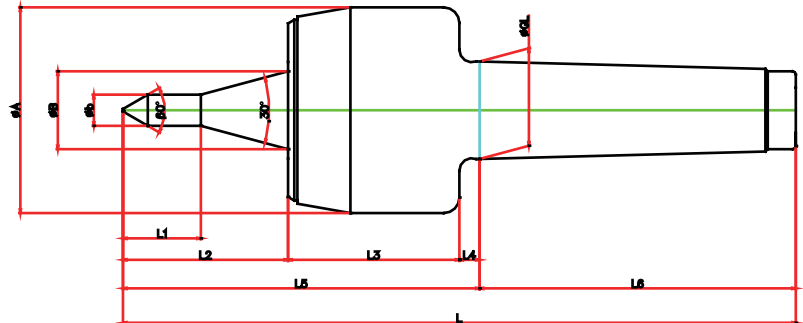

unit:mm/kg

Model	Morse Taper	Dimension											Weight Max. (lbs)	R.P.M Max.	Run out (inch)
		G	A	B	d	L1	L2	L3	L4	L5	L6	L			
LC-3NCTH-06	Mt.3	23,825	52	22	6	16,3	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-3NCTH-08	Mt.3	23,825	52	22	8	20	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-3NCTH-10	Mt.3	23,825	52	22	10	23,7	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-3NCTH-12	Mt.3	23,825	52	22	12	27,5	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-3NCTH-14	Mt.3	23,825	52	22	14	31,2	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-3NCTH-16	Mt.3	23,825	52	22	16	34,9	50	51	5	100	81	181	992,08	4,800	0,00011811
LC-4NCTH-06	Mt.4	31,267	66	25	6	17,5	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-4NCTH-08	Mt.4	31,267	66	25	8	21,3	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-4NCTH-10	Mt.4	31,267	66	25	10	25	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-4NCTH-12	Mt.4	31,267	66	25	12	28,7	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-4NCTH-14	Mt.4	31,267	66	25	14	32,5	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-4NCTH-16	Mt.4	31,267	66	25	16	36,2	53	55	6,5	114,5	101,5	216	1719,61	3,800	0,00011811
LC-5NCTH-06	Mt.5	44,399	82	32	6	16,5	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685
LC-5NCTH-08	Mt.5	44,399	82	32	8	20,2	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685
LC-5NCTH-10	Mt.5	44,399	82	32	10	23,9	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685
LC-5NCTH-12	Mt.5	44,399	82	32	12	27,7	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685
LC-5NCTH-14	Mt.5	44,399	82	32	14	31,4	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685
LC-5NCTH-16	Mt.5	44,399	82	32	16	35,1	65	65	6,5	136,5	129,5	266	2425,09	3,400	0,00019685

※SPECIAL sizes or dimensions are available with quick turnaround